

DEVA PLUS

NO WATER IS TOO DEEP

DEVAFILTER

IN-LINE RAINWATER FILTER

for $\varnothing 110$ to $\varnothing 160$




Devaplus specialises in total solutions to recover rainwater for toilets, washing machines, gardening and cleaning. Devaplus designs and develops premium quality products to keep the rainwater pure. Knowledge and service are high priorities for us. No water is too deep. www.devaplus.be



The advantages of the DEVAFILTER

- No drop necessary
- Easy to access and handle
- Lightweight design
- Simple maintenance
- Strong mesh
- Filter and rain tank under the same cover
- Suitable for all sloping roof surfaces (tiles or slates) and most flat roofs (*)

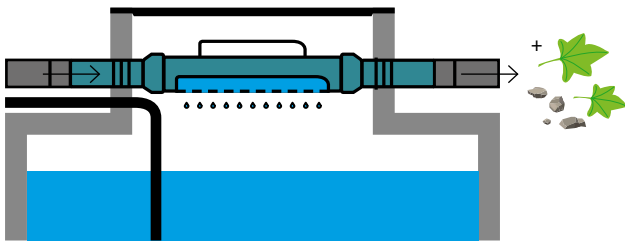


The purifying effect of the DEVAFILTER

An efficient rainwater filter is indispensable if rainwater is to be used for toilets, washing machines, gardening and cleaning. This patented Devafilter is integrated in the manhole above the rainwater tank, level, and in line with the inflow and outflow. Rainwater enters through the inflow and falls through the stainless-steel mesh of the filter into the tank. The dirt that remains in the filter is washed away by heavy rainfall or when the water tank overflows.

Simple maintenance

In the case of tough dirt (e.g. grease after installation of drainage system) the filter can be easily disassembled by lifting the filter section and rinsing this with warm water.

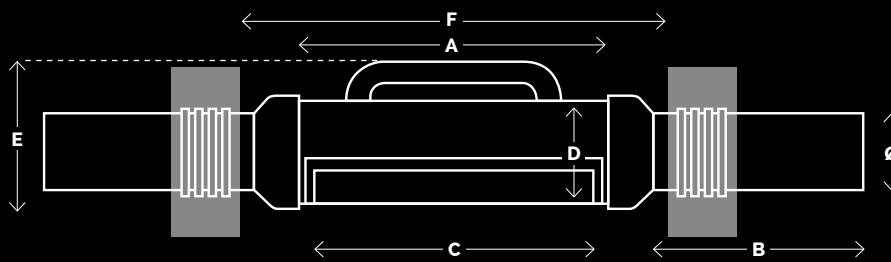

Ø max.	Roof surface area	Max.flow	Weight	A	B	C	D	E	F	Color	Material
mm	m ²	l/sec (**)	kg	mm	mm	mm	mm	mm	mm		
110	200	4	1.82	480	300	400	140	195	600	Blue	PP
125	200	4	2.13	480	300	400	140	195	600	Blue	PP
160	400	8	3.22	504	300	450	180	235	600	Blue	PP

Installation instructions

- Regular maintenance = 100% efficiency.
- The Devafilter must be installed level.
- The first two cleans should be carried out using a degreasing cleaning agent, in order to thoroughly remove grease residues that have flowed in from the sealing rings.
- The filter should be checked occasionally.

Devaplus accepts no liability arising from any use of our products that is not in accordance with the standard instructions or the applications indicated in our technical and commercial documents. (*) Some roofing materials used on flat roofs give the rainwater a yellow-brown colour. (**) Inclines 0,5cm/m



DEVACONTROL



DEVAFILTER




PUMP DIVERTRON X




Total solutions using the DEVAFILTER

B. The DEVACONTROL is placed before the DEVAFILTER.

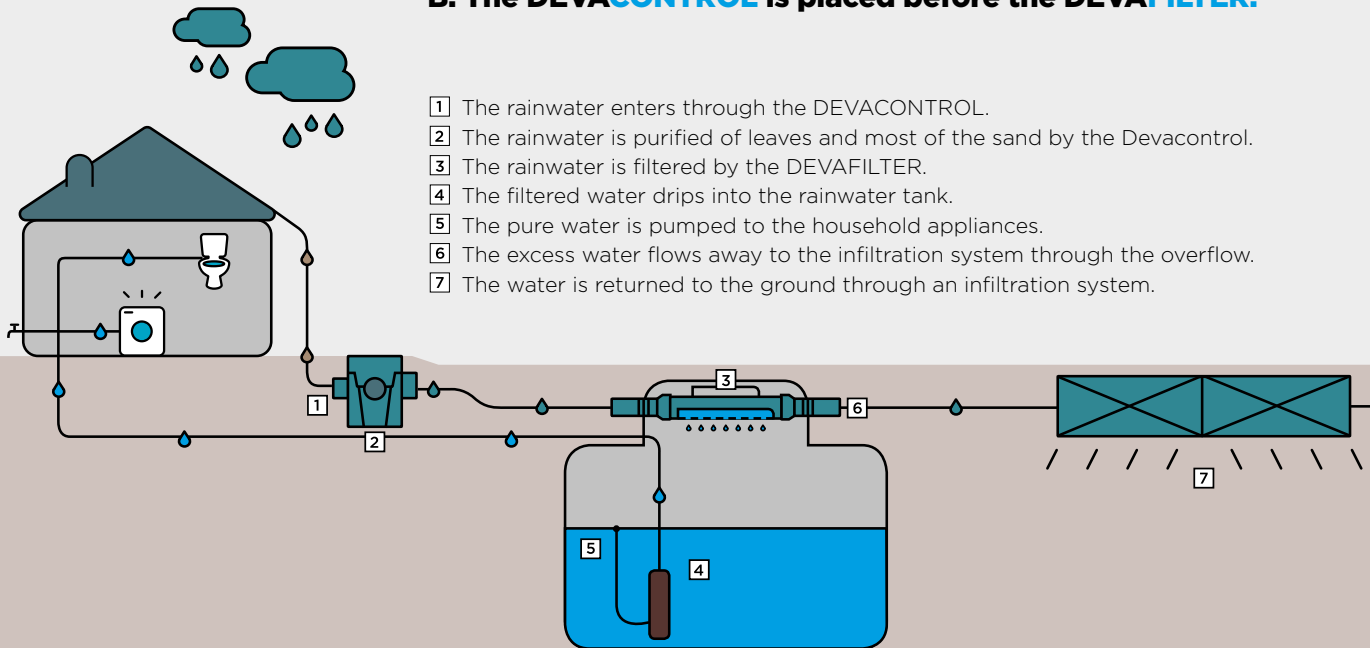

ROOF WATER
 OVERFLOW WATER
 FILTERED WATER

B. The DEVAFILTER is placed before the DEVACONTROL.

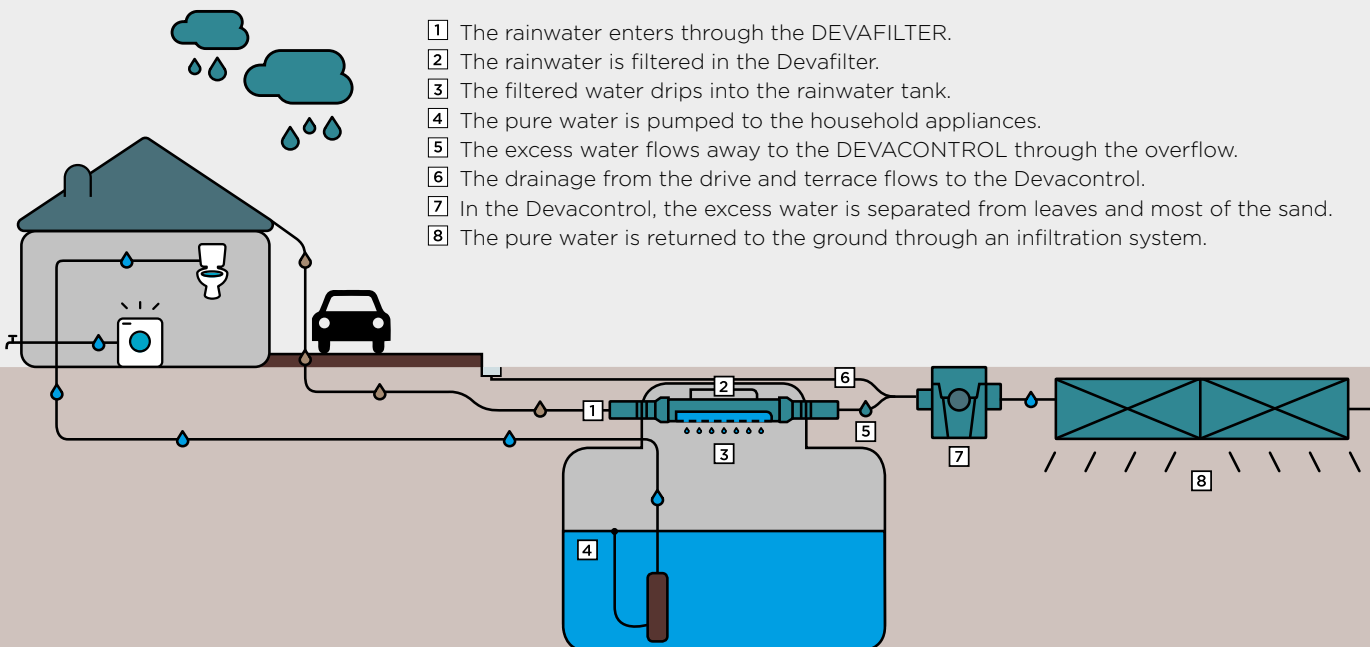

DEVA PLUS

NO WATER IS TOO DEEP



DEVAFILTER
IN-LINE RAINWATER FILTER
for $\varnothing 110$ to $\varnothing 160$

DEVABOX
RAINWATER FILTER



DEVACONTROL
SAND AND LEAF CATCHER

DEVAXL-FILTER
RAINWATER FILTER
for $\varnothing 200$ - $\varnothing 250$ - $\varnothing 315$ - $\varnothing 400$

